
Stream: Internet Engineering Task Force (IETF)
RFC: [9618](#)
Updates: [5280](#)
Category: Standards Track
Published: July 2024
ISSN: 2070-1721
Author: D. Benjamin
Google LLC

RFC 9618

Updates to X.509 Policy Validation

Abstract

This document updates RFC 5280 to replace the algorithm for X.509 policy validation with an equivalent, more efficient algorithm. The original algorithm built a structure that scaled exponentially in the worst case, leaving implementations vulnerable to denial-of-service attacks.

Status of This Memo

This is an Internet Standards Track document.

This document is a product of the Internet Engineering Task Force (IETF). It represents the consensus of the IETF community. It has received public review and has been approved for publication by the Internet Engineering Steering Group (IESG). Further information on Internet Standards is available in Section 2 of RFC 7841.

Information about the current status of this document, any errata, and how to provide feedback on it may be obtained at <https://www.rfc-editor.org/info/rfc9618>.

Copyright Notice

Copyright (c) 2024 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Revised BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Revised BSD License.

Table of Contents

1. Introduction	3
1.1. Summary of Changes from RFC 5280	3
2. Conventions and Definitions	3
3. Denial-of-Service Vulnerability	4
3.1. Policy Trees	4
3.2. Exponential Growth	5
3.3. Attack Vector	6
4. Avoiding Exponential Growth	6
4.1. Policy Graphs	7
4.2. Verification Outputs	8
5. Updates to RFC 5280	9
5.1. Updates to Section 6.1	9
5.2. Updates to Section 6.1.2	9
5.3. Updates to Section 6.1.3	11
5.4. Updates to Section 6.1.4	15
5.5. Updates to Section 6.1.5	16
5.6. Updates to Section 6.1.6	17
6. Other Mitigations	18
6.1. Verify Signatures First	18
6.2. Limit Certificate Depth	18
6.3. Limit Policy Tree Size	19
6.4. Inhibit Policy Mapping	19
6.5. Disable Policy Checking	19
7. Security Considerations	19
8. IANA Considerations	19
9. References	19
9.1. Normative References	19

9.2. Informative References	20
Acknowledgements	20
Author's Address	20

1. Introduction

[RFC5280] defines a suite of extensions for determining the "policies" that apply to a certification path. A policy is described by an object identifier (OID) and a set of optional qualifiers.

Policy validation in [RFC5280] is complex. As an overview, the certificate policies extension (Section 4.2.1.4 of [RFC5280]) describes the policies, with optional qualifiers, under which an individual certificate was issued. The policy mappings extension (Section 4.2.1.5 of [RFC5280]) allows a CA certificate to map its policy OIDs to other policy OIDs in certificates that it issues. Subject to these mappings and other extensions, the certification path's overall policy set is the intersection of policies asserted by each certificate in the path, collecting the corresponding qualifiers.

The procedure in Section 6.1 of [RFC5280] determines this set in the course of certification path validation. It does so by building a policy tree, containing policies asserted by each certificate and the mappings between them. This tree can grow exponentially in the depth of the certification path, which means an attacker, with a small input, can cause a path validator to consume excessive memory and computational resources. This cost asymmetry can lead to a denial-of-service vulnerability in X.509-based applications, such as [CVE-2023-0464] and [CVE-2023-23524].

Section 3 describes this vulnerability. Section 4.1 describes the primary mitigation for this vulnerability, a replacement for the policy tree structure. Section 5 provides updates to [RFC5280], which implement this change. Finally, Section 6 discusses alternative mitigation strategies for X.509 applications.

1.1. Summary of Changes from RFC 5280

The algorithm for processing certificate policies and policy mappings is replaced with one that builds an equivalent but much more efficient structure. This new algorithm does not change the validity status of any certification path nor which certificate policies are valid for it.

2. Conventions and Definitions

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in BCP 14 [RFC2119] [RFC8174] when, and only when, they appear in all capitals, as shown here.

3. Denial-of-Service Vulnerability

This section discusses how the path validation algorithm defined in [Section 6.1.2](#) of [RFC5280] can lead to a denial-of-service vulnerability in X.509-based applications.

3.1. Policy Trees

[Section 6.1.2](#) of [RFC5280] constructs the `valid_policy_tree`, a tree of certificate policies, during certification path validation. The nodes at any given depth in the tree correspond to policies asserted by a certificate in the certification path. A node's parent policy is the policy in the issuer certificate that was mapped to this policy, and a node's children are the policies it was mapped to in the subject certificate.

For example, suppose a certification path contains:

- An intermediate certificate that asserts policy OIDs: OID1, OID2, and OID5. It contains mappings OID1 to OID3 and OID1 to OID4.
- An end-entity certificate that asserts policy OIDs: OID2, OID3, and OID6.

This would result in the tree shown in [Figure 1](#). Note that OID5 and OID6 are not included or mapped across the whole path, so they do not appear in the final structure.

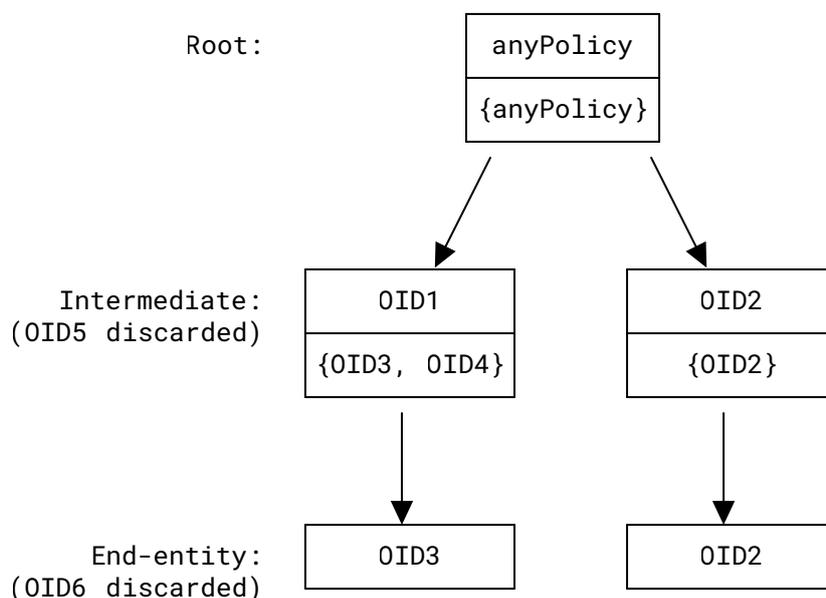


Figure 1: An Example X.509 Policy Tree

The complete algorithm for building this structure is described in steps (d), (e), and (f) of [Section 6.1.3](#) of [RFC5280]; steps (h), (i), and (j) of [Section 6.1.4](#) of [RFC5280]; and steps (a), (b), and (g) of [Section 6.1.5](#) of [RFC5280].

3.2. Exponential Growth

The `valid_policy_tree` grows exponentially in the worst case. In step (d.1) of [Section 6.1.3](#) of [RFC5280], a single policy P can produce multiple child nodes if multiple issuer policies map to P. This can cause the tree size to increase in size multiplicatively at each level.

In particular, consider a certificate chain where every intermediate certificate asserts policies OID1 and OID2 and then contains the full Cartesian product of mappings:

- OID1 maps to OID1
- OID1 maps to OID2
- OID2 maps to OID1
- OID2 maps to OID2

At each depth, the tree would double in size. For example, if there are two intermediate certificates and one end-entity certificate, the resulting tree would be as depicted in [Figure 2](#).

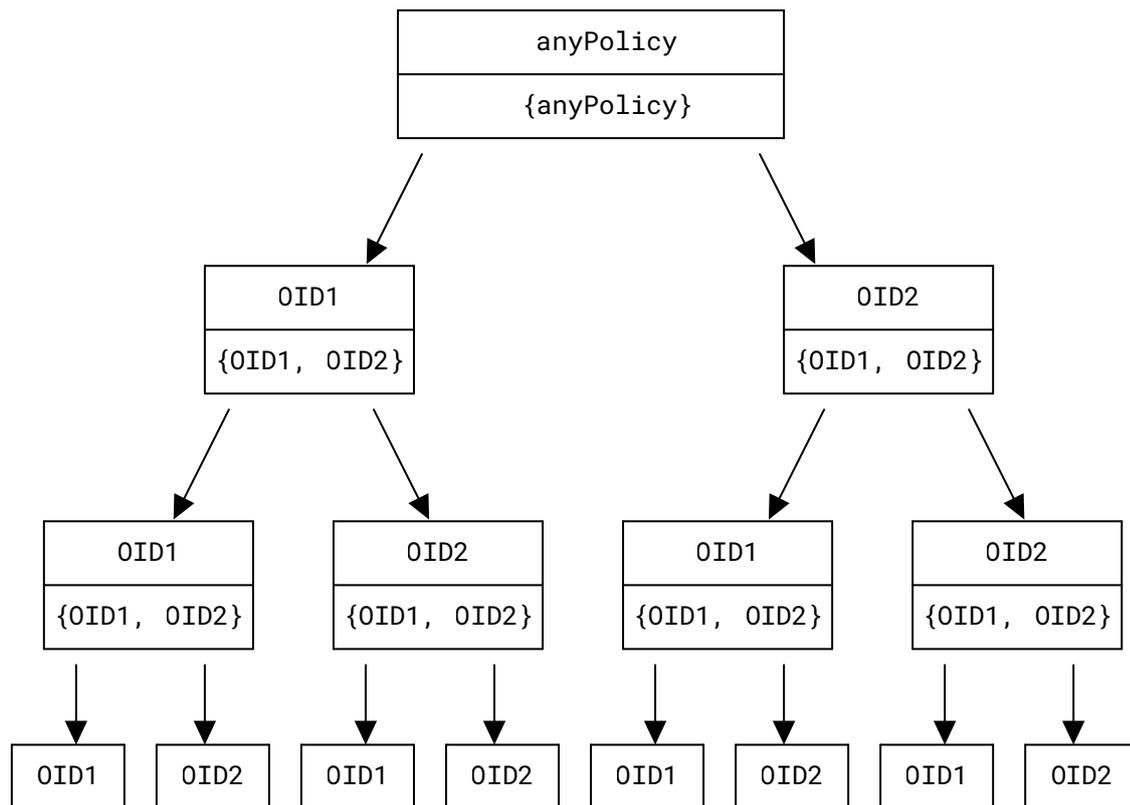


Figure 2: An Example X.509 Policy Tree with Exponential Growth

3.3. Attack Vector

An attacker can use the exponential growth to mount a denial-of-service attack against an X.509-based application. The attacker sends certificate chain as in [Section 3.2](#) and triggers the target application's certificate validation process. For example, the target application may be a TLS server [[RFC8446](#)] that performs client certificate validation. The target application will consume far more resources processing the input than the attacker consumed to send it, preventing it from servicing other clients.

4. Avoiding Exponential Growth

This document mitigates the denial-of-service vulnerability described in [Section 3](#) by replacing the policy tree with a policy graph structure described in this section. The policy graph grows linearly instead of exponentially. This removes the asymmetric cost in policy validation.

X.509 implementations **SHOULD** perform policy validation by building a policy graph, following the procedure described in [Section 5](#). This replacement procedure computes the same policies as in [\[RFC5280\]](#), but one of the outputs is in a different form. See [Section 4.2](#) for details. [Section 6](#) describes alternative mitigations for implementations that depend on the original, exponential-sized output.

4.1. Policy Graphs

The tree structure from [\[RFC5280\]](#) is an unnecessarily inefficient representation of a certification path's policy mappings. A single certificate policy may correspond to multiple nodes, but each node is identical with identical children. This redundancy is the source of the exponential growth described in [Section 3.2](#).

A policy graph is a directed acyclic graph of policy nodes. Where [\[RFC5280\]](#) adds multiple duplicate nodes, a policy graph adds a single node with multiple parents. See [Section 5](#) for the procedure for building this structure. [Figure 3](#) shows the updated representation of the example in [Figure 2](#).

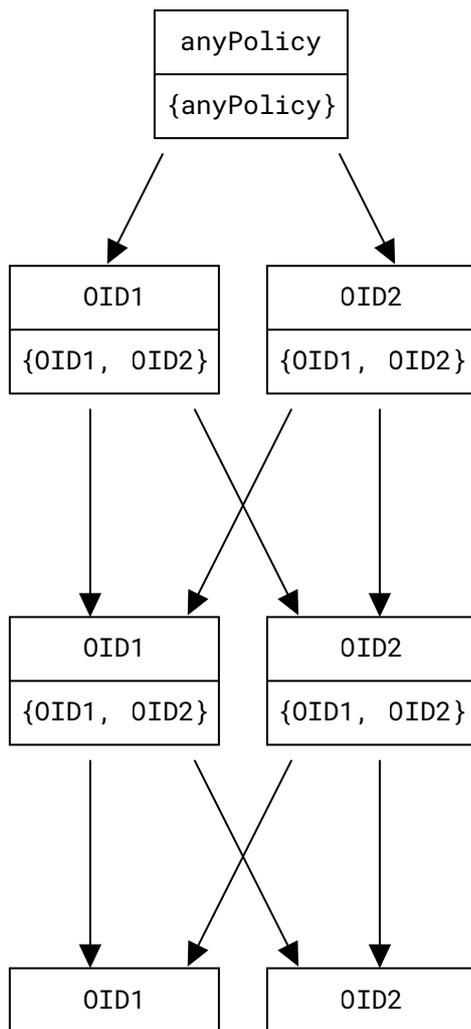


Figure 3: A More Efficient Representation of an X.509 Policy Tree

This graph's size is bounded linearly by the total number of certificate policies (Section 4.2.1.4 of [RFC5280]) and policy mappings (Section 4.2.1.5 of [RFC5280]). The policy tree from [RFC5280] is the tree of all paths from the root to a leaf in the policy graph, so no information is lost in the graph representation.

4.2. Verification Outputs

Section 6.1.6 of [RFC5280] describes the entire `valid_policy_tree` structure as an output of the verification process. Section 12.2 of [X.509], instead, only outputs the authorities-constrained policies, the user-constrained policies, and their associated qualifiers.

As the `valid_policy_tree` is the exponential structure, computing it reintroduces the denial-of-service vulnerability. X.509 implementations **SHOULD NOT** output the entire `valid_policy_tree` structure and, instead, **SHOULD** limit output to just the set of authorities-constrained and/or user-constrained policies, as described in [X.509]. Sections 5.6 and 6 discuss other mitigations for applications where this option is not available.

X.509 implementations **MAY** omit policy qualifiers from the output to simplify processing. Note Section 4.2.1.4 of [RFC5280] already recommends that certification authorities omit policy qualifiers from policy information terms.

5. Updates to RFC 5280

This section provides updates to [RFC5280]. This implements the changes described in Section 4.

5.1. Updates to Section 6.1

This update replaces a paragraph of Section 6.1 of [RFC5280] as follows:

OLD:

A particular certification path may not, however, be appropriate for all applications. Therefore, an application **MAY** augment this algorithm to further limit the set of valid paths. The path validation process also determines the set of certificate policies that are valid for this path, based on the certificate policies extension, policy mappings extension, policy constraints extension, and inhibit anyPolicy extension. To achieve this, the path validation algorithm constructs a valid policy tree. If the set of certificate policies that are valid for this path is not empty, then the result will be a valid policy tree of depth n , otherwise the result will be a null valid policy tree.

NEW:

A particular certification path may not, however, be appropriate for all applications. Therefore, an application **MAY** augment this algorithm to further limit the set of valid paths. The path validation process also determines the set of certificate policies that are valid for this path, based on the certificate policies extension, policy mappings extension, policy constraints extension, and inhibit anyPolicy extension. To achieve this, the path validation algorithm constructs a valid policy set, which may be empty if no certificate policies are valid for this path.

5.2. Updates to Section 6.1.2

This update replaces entry (a) of Section 6.1.2 of [RFC5280] with the following text:

- (a) `valid_policy_graph`: A directed acyclic graph of certificate policies with their optional qualifiers; each of the leaves of the graph represents a valid policy at this stage in the certification path validation. If valid policies exist at this stage in the certification path validation, the depth of the graph is equal to the number of certificates in the chain that have been processed. If valid policies do not exist at this stage in the certification path validation, the graph is set to NULL. Once the graph is set to NULL, policy processing ceases. Implementations *MAY* omit qualifiers if not returned in the output.

Each node in the `valid_policy_graph` includes three data objects: the valid policy, a set of associated policy qualifiers, and a set of one or more expected policy values.

Nodes in the graph can be divided into depths, numbered starting at zero. A node at depth x can have zero or more children at depth $x+1$ and, with the exception of depth zero, one or more parents at depth $x-1$. No other edges between nodes may exist.

If the node is at depth x , the components of the node have the following semantics:

- (1) The `valid_policy` is a single policy OID representing a valid policy for the path of length x .
- (2) The `qualifier_set` is a set of policy qualifiers associated with the valid policy in certificate x . It is only necessary to maintain this field if policy qualifiers are returned to the application. See Section 6.1.5, step (g).
- (3) The `expected_policy_set` contains one or more policy OIDs that would satisfy this policy in the certificate $x+1$.

The initial value of the `valid_policy_graph` is a single node with `valid_policy` `anyPolicy`, an empty `qualifier_set`, and an `expected_policy_set` with the single value `anyPolicy`. This node is considered to be at depth zero.

The graph additionally satisfies the following invariants:

- For any depth x and policy OID P-OID, there is at most one node at depth x whose `valid_policy` is P-OID.
- The `expected_policy_set` of a node whose `valid_policy` is `anyPolicy` is always `{anyPolicy}`.
- A node at depth x whose `valid_policy` is `anyPolicy`, except for the one at depth zero, always has exactly one parent: a node at depth $x-1$ whose `valid_policy` is also `anyPolicy`.

- Each node at depth greater than 0 has either one or more parent nodes whose `valid_policy` is not `anyPolicy`, or a single parent node whose `valid_policy` is `anyPolicy`. That is, a node cannot simultaneously be a child of both `anyPolicy` and some non-`anyPolicy` OID.

Figure 4 is a graphic representation of the initial state of the `valid_policy_graph`. Additional figures will use this format to describe changes in the `valid_policy_graph` during path processing.

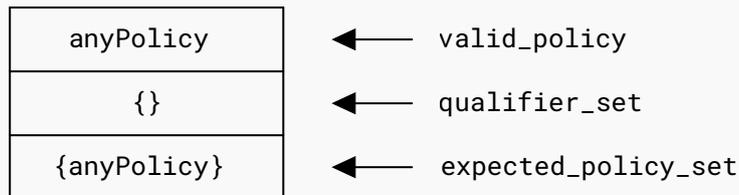


Figure 4: Initial Value of the `valid_policy_graph` State Variable

5.3. Updates to Section 6.1.3

This update replaces steps (d), (e), and (f) of Section 6.1.3 of [RFC5280] with the following text:

- (d) If the certificate policies extension is present in the certificate and the `valid_policy_graph` is not NULL, process the policy information by performing the following steps in order:
- (1) For each policy P not equal to `anyPolicy` in the certificate policies extension, let P-OID denote the OID for policy P and P-Q denote the qualifier set for policy P. Perform the following steps in order:
 - (i) Let `parent_nodes` be the nodes at depth i-1 in the `valid_policy_graph` where P-OID is in the `expected_policy_set`. If `parent_nodes` is not empty, create a child node as follows: set the `valid_policy` to P-OID, set the `qualifier_set` to P-Q, set the `expected_policy_set` to {P-OID}, and set the parent nodes to `parent_nodes`.

For example, consider a `valid_policy_graph` with a node of depth i-1 where the `expected_policy_set` is {Gold, White} and a second node where the `expected_policy_set` is {Gold, Yellow}. Assume the

certificate policies Gold and Silver appear in the certificate policies extension of certificate *i*. The Gold policy is matched, but the Silver policy is not. This rule will generate a child node of depth *i* for the Gold policy. The result is shown as [Figure 5](#).

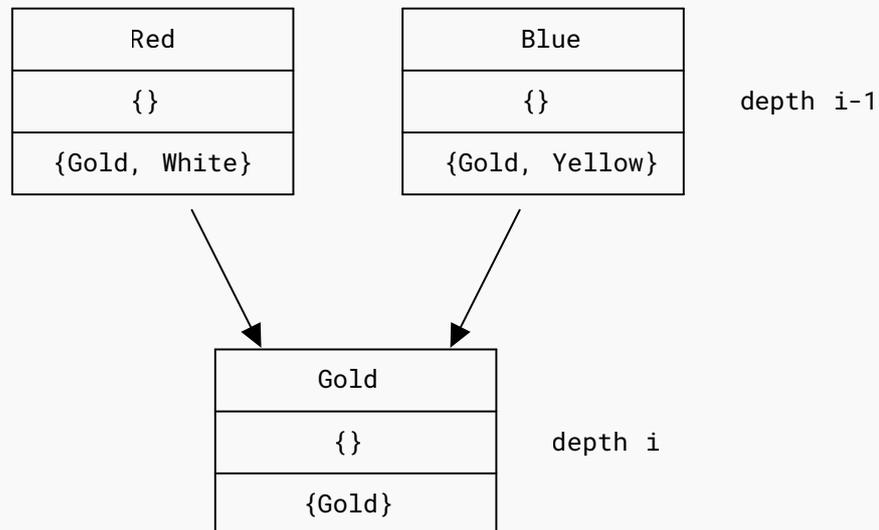


Figure 5: Processing an Exact Match

- (ii) If there was no match in step (i) and the `valid_policy_graph` includes a node of depth *i-1* with the `valid_policy` `anyPolicy`, generate a child node with the following values: set the `valid_policy` to `P-OID`, set the `qualifier_set` to `P-Q`, set the `expected_policy_set` to `{P-OID}`, and set the parent node to the `anyPolicy` node at depth *i-1*.

For example, consider a `valid_policy_graph` with a node of depth *i-1* where the `valid_policy` is `anyPolicy`. Assume the certificate policies Gold and Silver appear in the certificate policies extension of certificate *i*. The Gold policy does not have a qualifier, but the Silver policy has the qualifier `Q-Silver`. If Gold and Silver were not matched in (i) above, this rule will generate two child nodes of depth *i*, one for each policy. The result is shown as [Figure 6](#).

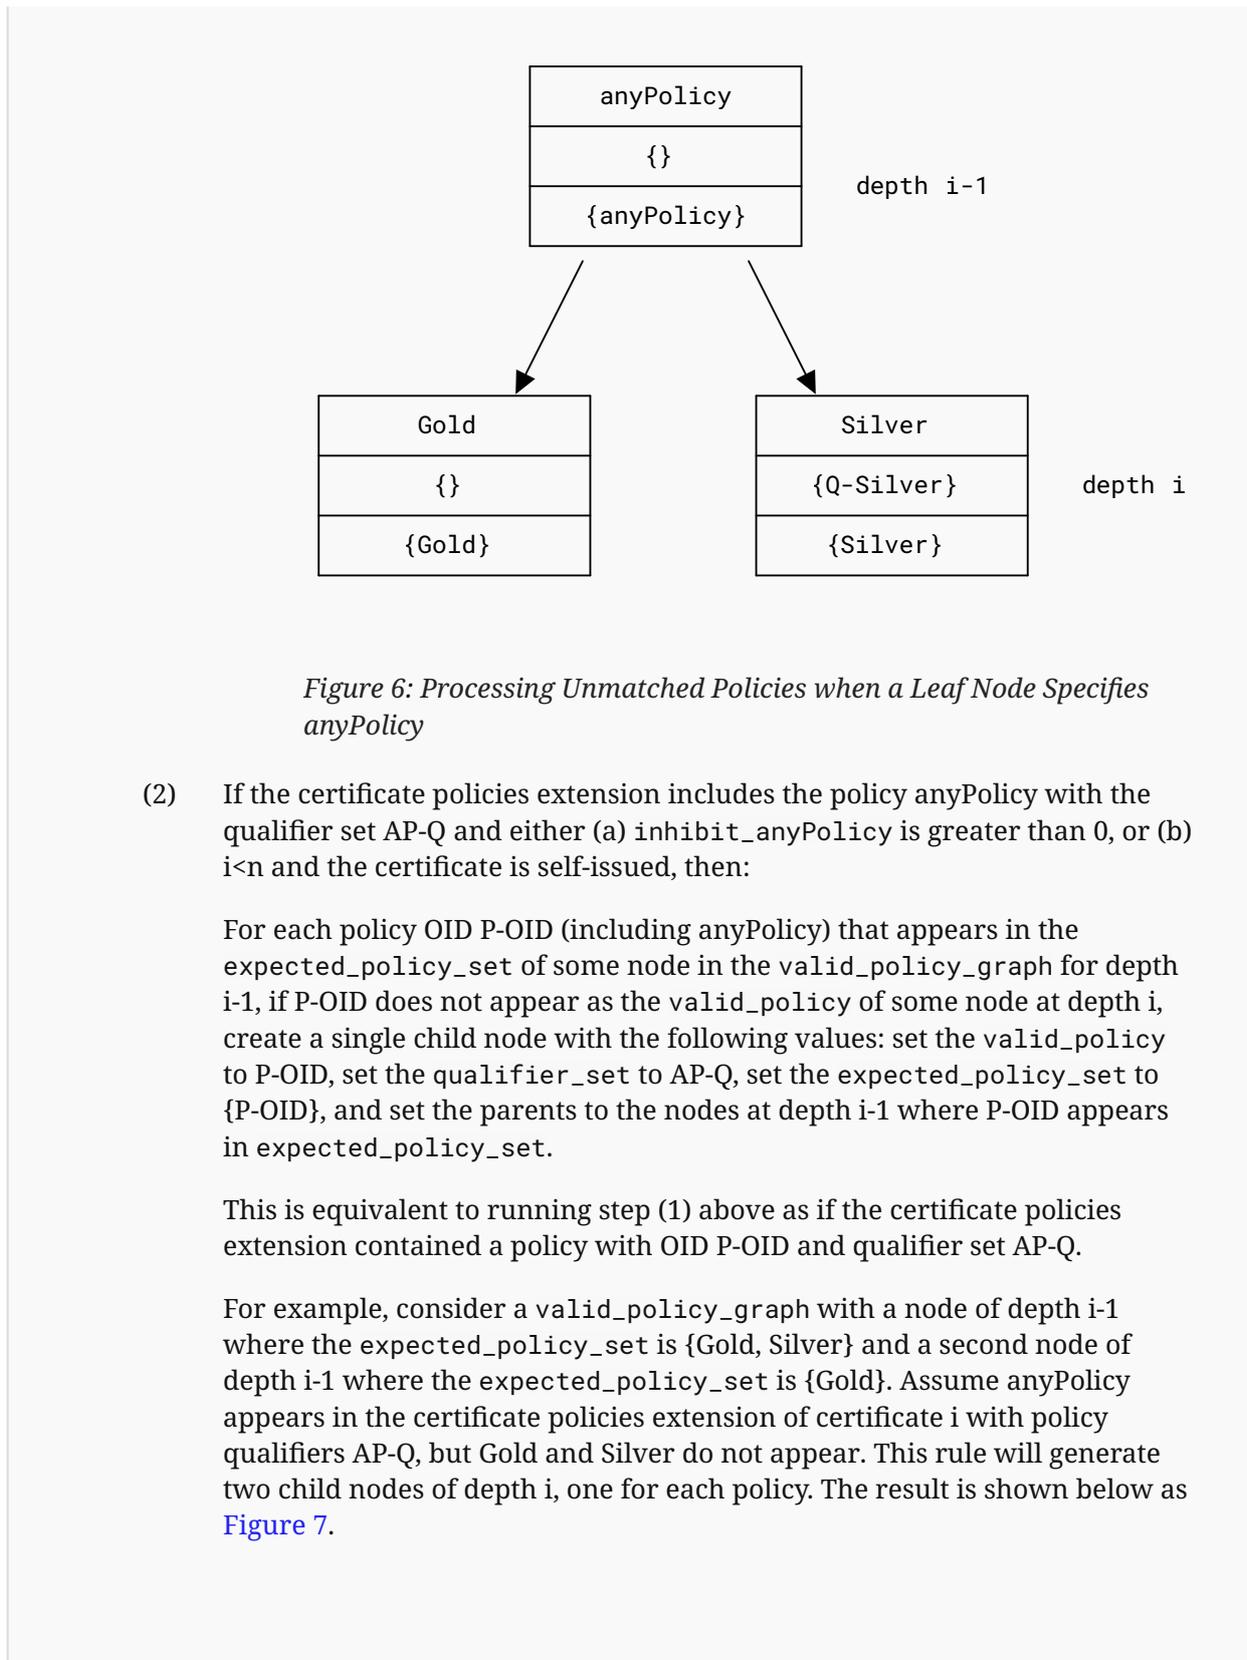


Figure 6: Processing Unmatched Policies when a Leaf Node Specifies anyPolicy

- (2) If the certificate policies extension includes the policy anyPolicy with the qualifier set AP-Q and either (a) inhibit_anyPolicy is greater than 0, or (b) $i < n$ and the certificate is self-issued, then:

For each policy OID P-OID (including anyPolicy) that appears in the expected_policy_set of some node in the valid_policy_graph for depth i-1, if P-OID does not appear as the valid_policy of some node at depth i, create a single child node with the following values: set the valid_policy to P-OID, set the qualifier_set to AP-Q, set the expected_policy_set to {P-OID}, and set the parents to the nodes at depth i-1 where P-OID appears in expected_policy_set.

This is equivalent to running step (1) above as if the certificate policies extension contained a policy with OID P-OID and qualifier set AP-Q.

For example, consider a valid_policy_graph with a node of depth i-1 where the expected_policy_set is {Gold, Silver} and a second node of depth i-1 where the expected_policy_set is {Gold}. Assume anyPolicy appears in the certificate policies extension of certificate i with policy qualifiers AP-Q, but Gold and Silver do not appear. This rule will generate two child nodes of depth i, one for each policy. The result is shown below as [Figure 7](#).

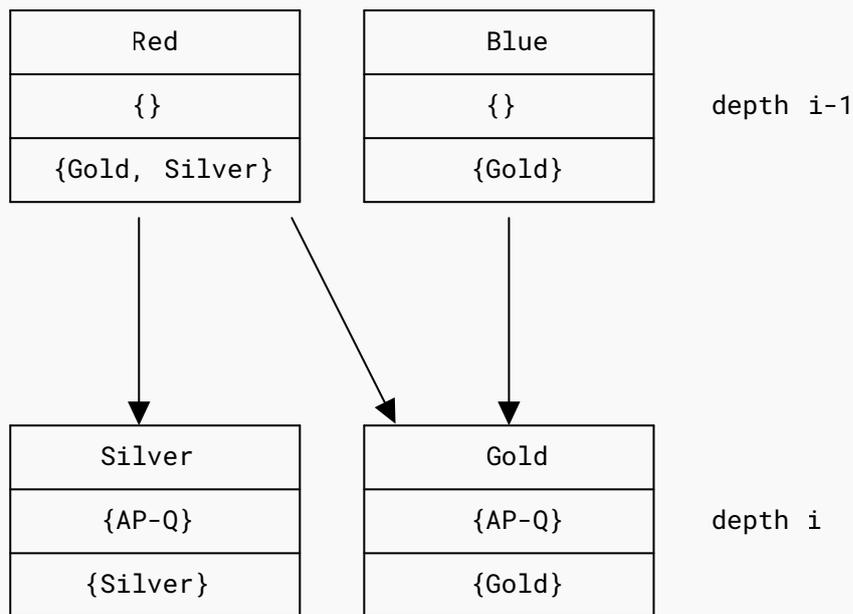


Figure 7: Processing Unmatched Policies when the Certificate Policies Extension Specifies anyPolicy

- (3) If there is a node in the `valid_policy_graph` of depth $i-1$ or less without any child nodes, delete that node. Repeat this step until there are no nodes of depth $i-1$ or less without children.

For example, consider the `valid_policy_graph` shown in [Figure 8](#) below. The two nodes at depth $i-1$ that are marked with an 'X' have no children, and they are deleted. Applying this rule to the resulting graph will cause the nodes at depth $i-2$ that is marked with a 'Y' to be deleted. In the resulting graph, there are no nodes of depth $i-1$ or less without children, and this step is complete.

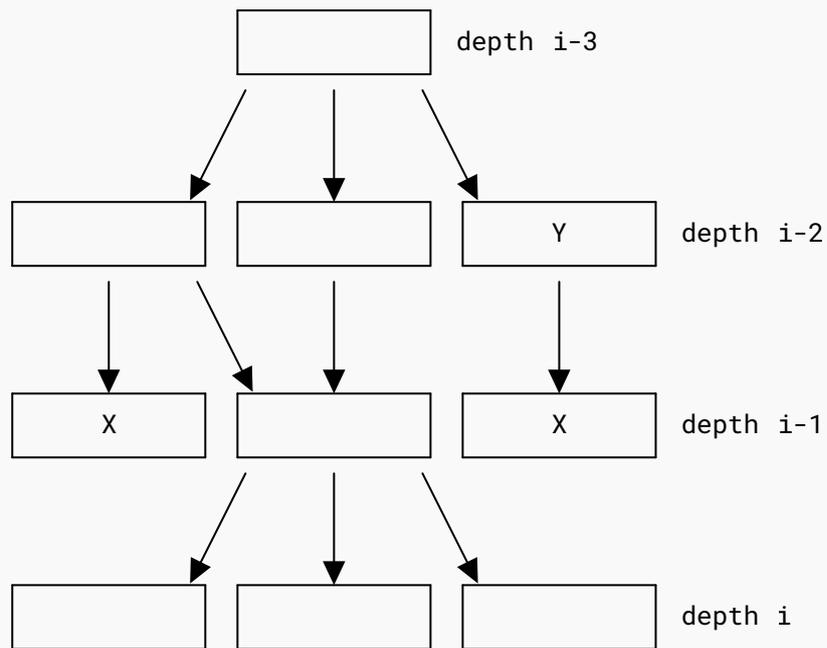


Figure 8: Pruning the `valid_policy_graph`

- (e) If the certificate policies extension is not present, set the `valid_policy_graph` to NULL.
- (f) Verify that either `explicit_policy` is greater than 0, or the `valid_policy_graph` is not equal to NULL.

5.4. Updates to Section 6.1.4

This update replaces step (b) of [Section 6.1.4](#) of [\[RFC5280\]](#) with the following text:

- (b) If a policy mappings extension is present, then for each issuerDomainPolicy ID-P in the policy mappings extension:
 - (1) If the `policy_mapping` variable is greater than 0 and there is a node in the `valid_policy_graph` of depth `i` where ID-P is the `valid_policy`, set `expected_policy_set` to the set of subjectDomainPolicy values that are specified as equivalent to ID-P by the policy mappings extension.

- (2) If the `policy_mapping` variable is greater than 0, no node of depth `i` in the `valid_policy_graph` has a `valid_policy` of ID-P, but there is a node of depth `i` with a `valid_policy` of anyPolicy, then generate a child node of the node of depth `i-1` that has a `valid_policy` of anyPolicy as follows:
 - (i) set the `valid_policy` to ID-P;
 - (ii) set the `qualifier_set` to the qualifier set of the policy anyPolicy in the certificate policies extension of certificate `i`; and
 - (iii) set the `expected_policy_set` to the set of `subjectDomainPolicy` values that are specified as equivalent to ID-P by the policy mappings extension.
- (3) If the `policy_mapping` variable is equal to 0:
 - (i) delete the node, if any, of depth `i` in the `valid_policy_graph` where ID-P is the `valid_policy`.
 - (ii) If there is a node in the `valid_policy_graph` of depth `i-1` or less without any child nodes, delete that node. Repeat this step until there are no nodes of depth `i-1` or less without children.

5.5. Updates to Section 6.1.5

This update replaces step (g) of [Section 6.1.5](#) of [\[RFC5280\]](#) with the following text:

- (g) Calculate the `user_constrained_policy_set` as follows. The `user_constrained_policy_set` is a set of policy OIDs, along with associated policy qualifiers.
 - (1) If the `valid_policy_graph` is NULL, set `valid_policy_node_set` to the empty set.
 - (2) If the `valid_policy_graph` is not NULL, set `valid_policy_node_set` to the set of policy nodes whose `valid_policy` is not anyPolicy and whose parent list is a single node with `valid_policy` of anyPolicy.
 - (3) If the `valid_policy_graph` is not NULL and contains a node of depth `n` with the `valid_policy` anyPolicy, add it to `valid_policy_node_set`.
 - (4) Compute `authority_constrained_policy_set`, a set of policy OIDs and associated qualifiers as follows. For each node in `valid_policy_node_set`:
 - (i)

- Add the node's `valid_policy` to `authority_constrained_policy_set`.
- (ii) Collect all qualifiers in the node, its ancestors, and descendants and associate them with `valid_policy`. Applications that do not use policy qualifiers **MAY** skip this step to simplify processing.
- (5) Set `user_constrained_policy_set` to `authority_constrained_policy_set`.
 - (6) If the `user-initial-policy-set` is not `anyPolicy`:
 - (i) Remove any elements of `user_constrained_policy_set` that do not appear in `user-initial-policy-set`.
 - (ii) If `anyPolicy` appears in `authority_constrained_policy_set` with qualifiers AP-Q, for each OID P-OID in `user-initial-policy-set` that does not appear in `user_constrained_policy_set`, add P-OID with qualifiers AP-Q to `user_constrained_policy_set`.

Additionally, this update replaces the final paragraph as follows:

OLD:

If either (1) the value of `explicit_policy` variable is greater than zero or (2) the `valid_policy_tree` is not NULL, then path processing has succeeded.

NEW:

If either (1) the value of `explicit_policy` is greater than zero, or (2) the `user_constrained_policy_set` is not empty, then path processing has succeeded.

5.6. Updates to Section 6.1.6

This update replaces [Section 6.1.6](#) of [RFC5280] with the following text:

If path processing succeeds, the procedure terminates, returning a success indication together with final value of the `user_constrained_policy_set`, the `working_public_key`, the `working_public_key_algorithm`, and the `working_public_key_parameters`.

Note that the original procedure described in [RFC5280] included a `valid_policy_tree` structure as part of the output. This structure grows exponentially in the size of the input, so computing it risks denial-of-service vulnerabilities in X.509-based applications, such as [CVE-2023-0464] and [CVE-2023-23524]. Accordingly, this output is deprecated. Computing this structure is **NOT RECOMMENDED**.

An implementation that requires `valid_policy_tree` for compatibility with legacy systems may compute it from `valid_policy_graph` by recursively duplicating every multi-parent node. This may be done on-demand when the calling application first requests this output. However, this computation may consume exponential time and memory, so such implementations **SHOULD** mitigate denial-of-service in other ways, such as limiting the depth or size of the tree.

6. Other Mitigations

X.509 implementations that are unable switch to the policy graph structure **SHOULD** mitigate the denial-of-service attack in other ways. This section describes alternate mitigation and partial mitigation strategies.

6.1. Verify Signatures First

X.509 validators **SHOULD** verify signatures in certification paths before or in conjunction with policy verification. This limits the attack to entities in control of CA certificates. For some applications, this may be sufficient to mitigate the attack. However, other applications may still be impacted. For example:

- Any application that evaluates an untrusted PKI, such as a hosting provider that evaluates a customer-supplied PKI
- Any application that evaluates an otherwise trusted PKI but where untrusted entities have technically constrained intermediate certificates where policy mapping and path length are unconstrained.

6.2. Limit Certificate Depth

The policy tree grows exponentially in the depth of a certification path, so limiting the depth and certificate size can mitigate the attack.

However, this option may not be viable for all applications. Too low of a limit may reject existing paths that the application wishes to accept. Too high of a limit may still admit a denial-of-service attack for the application. By modifying the example in [Section 3.2](#) to increase the number of policies asserted in each certificate, an attacker could still achieve $O(N^{(\text{depth}/2)})$ scaling.

6.3. Limit Policy Tree Size

The attack can be mitigated by limiting the number of nodes in the policy tree and rejecting the certification path if this limit is reached. This limit should be set high enough to still admit existing valid certification paths for the application but low enough to no longer admit a denial-of-service attack.

6.4. Inhibit Policy Mapping

If policy mapping is disabled via the initial-policy-mapping-inhibit setting (see [Section 6.1.1](#) of [\[RFC5280\]](#)), the attack is mitigated. This also significantly simplifies the X.509 implementation, which reduces the risk of other security bugs. However, this will break compatibility with any existing certification paths that rely on policy mapping.

To facilitate this mitigation, certificate authorities **SHOULD NOT** issue certificates with the policy mappings extension ([Section 4.2.1.5](#) of [\[RFC5280\]](#)). Applications maintaining policies for accepted trust anchors are **RECOMMENDED** to forbid this extension in participating certificate authorities.

6.5. Disable Policy Checking

An X.509 validator can mitigate this attack by disabling policy validation entirely. This may be viable for applications that do not require policy validation. In this case, critical policy-related extensions, notably the policy constraints ([Section 4.2.1.11](#) of [\[RFC5280\]](#)), **MUST** be treated as unrecognized extensions as in [Section 4.2](#) of [\[RFC5280\]](#) and be rejected.

7. Security Considerations

[Section 3](#) discusses how [\[RFC5280\]](#)'s policy tree algorithm can lead to denial-of-service vulnerabilities in X.509-based applications, such as [\[CVE-2023-0464\]](#) and [\[CVE-2023-23524\]](#).

[Section 5](#) replaces this algorithm to avoid this issue. As discussed in [Section 4.1](#), the new structure scales linearly with the input. This means input limits in X.509 validators will more naturally bound processing time and, thus, avoiding these vulnerabilities.

8. IANA Considerations

This document has no IANA actions.

9. References

9.1. Normative References

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.

- [RFC5280]** Cooper, D., Santesson, S., Farrell, S., Boeyen, S., Housley, R., and W. Polk, "Internet X.509 Public Key Infrastructure Certificate and Certificate Revocation List (CRL) Profile", RFC 5280, DOI 10.17487/RFC5280, May 2008, <<https://www.rfc-editor.org/info/rfc5280>>.
- [RFC8174]** Leiba, B., "Ambiguity of Uppercase vs Lowercase in RFC 2119 Key Words", BCP 14, RFC 8174, DOI 10.17487/RFC8174, May 2017, <<https://www.rfc-editor.org/info/rfc8174>>.

9.2. Informative References

- [CVE-2023-0464]** CVE, "Excessive Resource Usage Verifying X.509 Policy Constraints", CVE-2023-0464, March 2023, <<https://www.cve.org/CVERecord?id=CVE-2023-0464>>.
- [CVE-2023-23524]** CVE, "Processing a maliciously crafted certificate may lead to a denial-of-service", CVE-2023-23524, February 2023, <<https://www.cve.org/CVERecord?id=CVE-2023-23524>>.
- [RFC8446]** Rescorla, E., "The Transport Layer Security (TLS) Protocol Version 1.3", RFC 8446, DOI 10.17487/RFC8446, August 2018, <<https://www.rfc-editor.org/info/rfc8446>>.
- [X.509]** ITU-T, "Information technology - Open Systems Interconnection - The Directory: Public-key and attribute certificate frameworks", ITU-T Recommendation X.509, October 2019, <<https://www.itu.int/rec/T-REC-X.509>>.

Acknowledgements

The author thanks Bob Beck, Adam Langley, Matt Mueller, and Ryan Sleevi for many valuable discussions that led to discovering this issue, understanding it, and developing the mitigation. The author also thanks Martin Thomson, Job Snijders, and John Scudder for their review and feedback on this document.

Author's Address

David Benjamin
Google LLC
Email: davidben@google.com